


# 9862 SURFACE MOUNT REED RELAYS

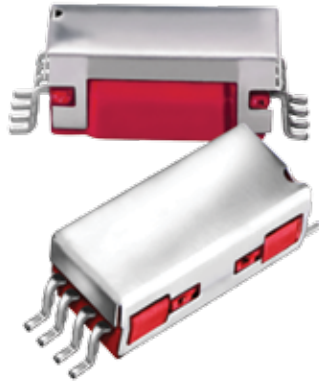

## 9862 Series Surface Mount Reed Relays

Ideally suited to the needs of Automated Test Equipment, Instrumentation and Telecommunications requirements, Coto's 9814 & 9852 Series is a miniature Surface Mount Reed Relay that combines small size with exceptional RF performance. The 9814 extends life at ATE loads 3X or more utilizing Coto's proprietary switch technology. The external Magnetic Shield reduces interaction between parts in high density boards. The 9852 adds Form C capability. Small size plus added features allow for high density packing, and make these relays ideal for designs such as high speed, high pin count VLSI testers where high speed, small size and high performance are all needed.




## 9862 Series Features

- ▶ Available in Gull wing and "J" lead configurations
- ▶ Tape and Reel packaging available
- ▶ High reliability, hermetically sealed contacts for long life
- ▶ High Insulation Resistance -  $10^9 \Omega$  minimum
- ▶ Coaxial shield for 50  $\Omega$  impedance
- ▶ 4.0 GHz NO cont; 3.2 GHz NC cont
- ▶ External Magnetic Shield
- ▶ RoHS compliant

## DIMENSIONS

*in Inches (Millimeters)*

### Model 9862

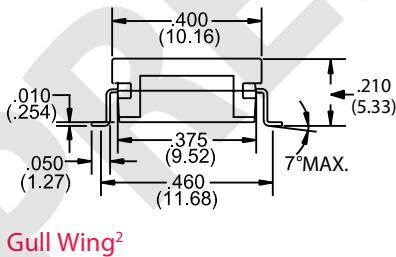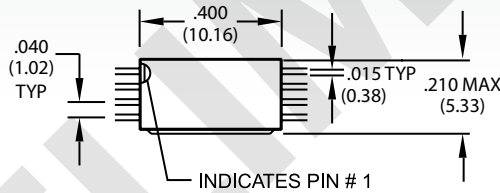

### NOTE

- ▶ For RF Graph Performance, see "RF Graphs" section of the *Reed Relay Technical & Application Information*

## Ordering Information


Part Number **9862-05-XX**

### Lead Style

00 = Gull Wing  
20 = J-Lead

MODEL NUMBER			9862
Parameters	Test Conditions	Units	1 Form C 50 Ω Coaxial
<b>COIL SPECS.</b>			
Nom. Coil Voltage		VDC	5
Max. Coil Voltage		VDC	6
Coil Resistance	+/- 10%, 25° C	Ω	70
Operate Voltage	Must Operate by	VDC - Max.	3.8
Release Voltage	Must Release by	VDC - Min.	0.4
<b>CONTACT RATINGS</b>			
Switching Voltage	Max DC/Peak AC Resist.	Volts	30
Switching Current	Max DC/Peak AC Resist.	Amps	0.1
Carry Current	Max DC/Peak AC Resist.	Amps	0.2
Contact Rating	Max DC/Peak AC Resist.	Watts	3
Life Expectancy-Typical <sup>1</sup>	Signal Level 1.0V, 10mA	x 10 <sup>6</sup> Ops.	100 N/C 200 N/O
Static Contact Resistance (max. init.)	50mV, 10mA	Ω	0.150
Dynamic Contact Resistance (max. init.)	0.5V, 50mA at 100 Hz, 1.5 msec	Ω	0.150
<b>RELAY SPECIFICATIONS</b>			
Insulation Resistance (minimum)	Between all Isolated Pins at 100V, 25°C, 40% RH	Ω	10 <sup>9</sup>
Capacitance - Typical Across Open Contacts	No Shield	pF	-
	Shield Floating	pF	-
	Shield Guarding	pF	1.0
Open Contact to Coil	No Shield	pF	-
	Shield Floating	pF	-
	Shield Guarding	pF	1.0
Closed Contact to Coil	Shield Guarding	pF	0.5
Contact to Shield	Contacts Open, Shield Floating	pF	-
Dielectric Strength (minimum)	Between Contacts	VDC/peak AC	200
	Contacts to Shield	VDC/peak AC	1000
	Contacts/Shield to Coil	VDC/peak AC	1000
Operate Time - including bounce - Typical	At Nominal Coil Voltage, 30 Hz Square Wave	msec.	1.0
Release Time - Typical		msec.	1.0

Top View:  
Dot stamped on top of relay refers to pin #1 location



**Notes:**

- <sup>1</sup> Consult factory for life expectancy at other switching loads. Contact resistance 2.0Ω defines end of life.
- <sup>2</sup> Surface mount component processing temperature: 500°F / 260°C max for 1 minute dwell time. Temperature measured on leads where lead exits molded package.

**Environmental Ratings:**

Storage Temp: -35°C to +100°C; Operating Temp: -20°C to +65°C  
All electrical parameters measured at 25°C unless otherwise specified.  
Vibration: 20 G's to 2000 Hz; Shock: 50 G's